


POM KEPITAL TE-24S		Grade	
- KEPITAL TE-24S	()	Grade	.
-	,	.	
		ISO 1183	g/cm ³ 1.32
		ISO 1133	g/10min 2
(23 , 50 %RH)		ISO 62	% 0.25
(1.8 MPa)		ISO 75	61
		UL 94	- HB
(10 /min)		ISO 11357	165
		ISO 11359	X 10 ⁻⁵ / 13
		ISO 527	MPa 38
		ISO 527	% 23.0
		ISO 527	% > 100
		ISO 178	MPa 46
		ISO 178	MPa 1,300
Charpy (Notched, 23)		ISO 179/1eA	kJ/m ² 28.0
		IEC 60093	Ω 1x10 ¹⁶
		IEC 60093	Ω • cm 1x10 ¹⁴
		IEC 60243-1	kV/mm -
(, t = 2 mm)		ISO 294-4	% 1.7
		ISO 1043	- POM-HI

Revision No : 6 (2020-07-21)

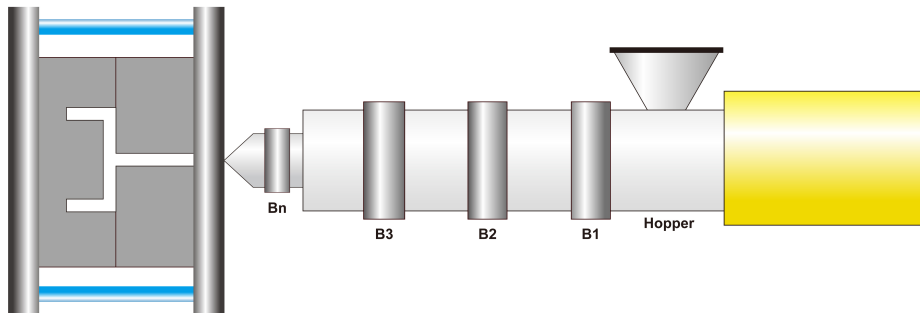

(: 0.1 %)

80	~ 90	3 h ~ 4 h	.
----	------	-----------	---

40 ~ 60	180 ~ 210	190 ~ 200	180 ~ 190	170 ~ 180	60 ~ 80
---------	-----------	-----------	-----------	-----------	---------

: Maximum 20 bar

2	30, T Tower 10	(04637)	94	15 (13901)
---	----------------	---------	----	------------

Tel: 02-6952-8377 Tel: 031- 436 -1300